

CP-0404MSD-W

4 channel (2D1+2CIF / 4 HD1 / 4CIF) Mobile DVR




Main Features

- 4 channel (2D1+2CIF / 4 HD1 / 4CIF) Mobile DVR
- H.264 video compression
- Linux operation systems
- dual streaming
- Digital watermark
- Dual SD cards storage, max 64GB for each
- 3G(WCDMA/EVDO)/WIFI/GPS modules optional
- 8 seconds power-off delay for data protection, prevent data lost and file destroyed by instant power-off
- RS485, RS232, Canbus, speed input interface
- Support peripheral device extension, e.g. control panel, bus stops announcement
- Black box for vehicles , recording speed, position, acceleration, temperature, brakes, backing up, turns, alarms and other important information
- DC8V~36V wide voltage power supply, industrial standard embedded design, aluminum metal shell, low power consumption
- Wide operating temperature range -25°C to +85°C
- Small size, vibration proof



Connection

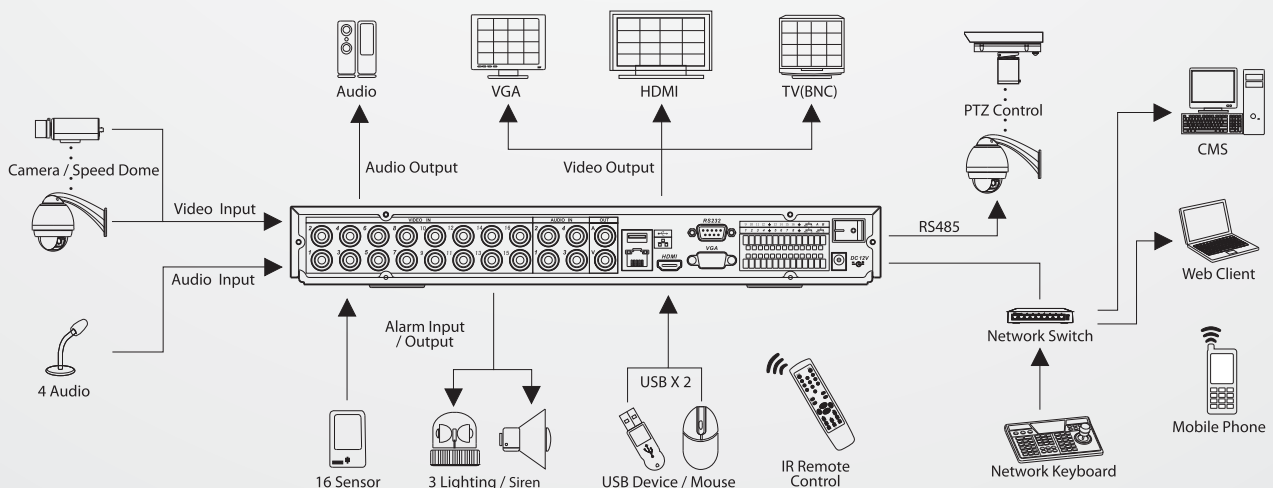

Specifications	CP-0404MSD-W
Operating System	Linux
User Interface	GUI
Control Devices	IR Remote control
Video Input	4 Ch., 1.0Vp-p, 75?
Video Output	2 CH RCA , Max. Res.:NK
Video Standard	PAL: 625 Lines, 50f/s; NTSC: 525 Lines, 60f/s
Compression	Video: H.264, Audio: ADPCM
Video Resolution	NTSC: 720 X 480fps , PAL: 720 X 576 fps
Video Recording	NTSC : 120fps @ 4CIF, PAL : 100fps @ 4CIF
Extra Stream	Supported
Video Display Split	1/4 Channel
Audio Input	4 Ch.
Audio Output	1 Ch.
Motion Detection	Supported
Alarm Input	6 Input
Alarm Output	2 Output
SD Card	2 SD cards, max 64GB for each
Playback	All Ch. Simultaneous playback
Interface Ports	RJ45 x 1, USB 2.0 x 2, RS232 x 1, RS485 x 1
Wi-Fi	802.11b/g
3G	WCDMA / EVDO
GPS	Supported
G-Sensor	Built-in G-sensor module
CANBus	1 Port
Power Supply	DC8V ~ 36V
Power Output	4 channel DC12V 2A
Power Consumption	6W-12W
Working Temp	-25? ~ +85?
Dimensions	180mmx138mmx45mm
Weight	0.9Kg