

CP-0404-0808-1616QD-T

4/8/16 Ch H.264 Real Time Full D1 Standalone DVR




Main Features

- 4/8/16 Ch H.264 real time Full D1 Standalone DVR
- 4/8/16 Channel D1 real time recording
- Standard H.264 baseline compression high image quality, low bite rate
- 4CH simultaneous playback. Express search by data/time and events(sensor, motion)
- Authorization management, admin/ advanced/ normal
- Email alert supported
- Intuitive and user-friendly Graphic User Interface(GUI), windows style operation by mouse
- Dual stream technology to encode recording stream and network stream separately
- Express and flexible backup by network, CD/DVDRW or USB devices
- Multi-mode recording: manual/timer/motion/sensor
- Pantplex: preview, record, play back, back up and remote access DHCP, DDNS, PPPoE network protocol supported.
- Powerful smart phone surveillance supporting Windows Mobile Symbian, Google phone and iphone. Compatible with 3G.
- Support PTZ Auto-scan preset and auto cruise, up to 128 presets and 32 cruises
- VGA output to get clearer display using CRT or LCD monitor



Connection

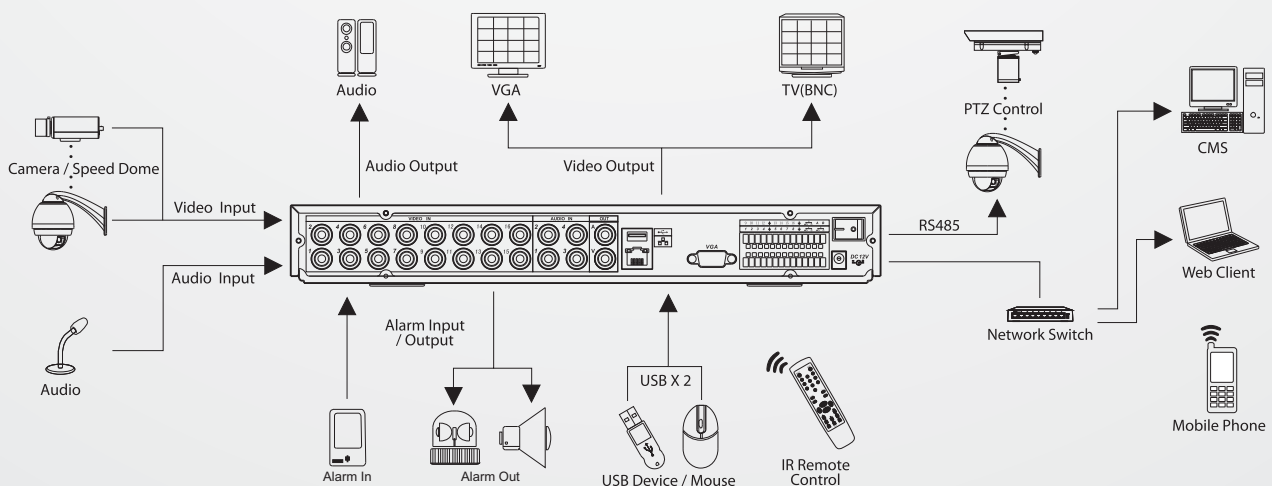

Specifications	CP-0404QD-T	CP-0808QD-T	CP-1616QD-T
Operating System	Embedded Linux		
User Interface	GUI		
Control Devices	Front panel, USB Mouse, IR Remote control		Front panel, USB Mouse, IR Remote control
Video Input	4 Ch., BNC, 1.0Vp-p, 75ohm	8 Ch., BNC, 1.0Vp-p, 75ohm	16 Ch., BNC, 1.0Vp-p, 75ohm
Video Output	Mainout*1, Spotout*1, VGA*1, Max. Res.:1280x1024		
Video Standard	PAL: 625 Lines, 50f/s; NTSC: 525 Lines, 60f/s		
Compression	Video: H.264		
Video Resolution	NTSC: 720 X 480fps , PAL: 720 X 576 fps		
Video Recording	NTSC : 120fps @ D1, PAL : 100fps @ D1	NTSC : 240fps @ D1, PAL : 200fps @ D1	NTSC : 480fps @ D1, PAL : 400fps @ D1
Extra Stream	Supported		
Video Display Split	Full and Multiple Screen Display, 1/4	Full and Multiple Screen Display, 1/4/9	Full and Multiple Screen Display, 1/4/9/16
Audio Input	4 Ch.	8 Ch.	16 Ch.
Bi-directional Talk Input	Supported		
Audio Output	1 Ch.		
Motion Detection	Supported		
Alarm Input	4 Input	8 Input	16 Input
Alarm Output	1 Output		
Hard Disk	4 SATA HDD, (Max 2 TB per HDD Supported)		
CD/DVDRW	Supported		
Recording Mode	Manual, Timer, Motion, Sensor		
Recording Priority	Manual>Alarm>Video detection>Continuous		
Playback	All Ch. Simultaneous playback		
Backup Mode	USB Devices, Network, CD/DVDRW		
Interface Ports	RJ45 x 1, USB 2.0 x 2, RS232 x 1, RS485 x 1		
Protocols	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Email, Alarm Server		
Remote Operations	Monitor, PTZ Control, Playback, System Setting, file download, Log information		
Power Supply	AC 100~240 V, 50/60 Hz		