

CP-0404-0804-1604HD-T

4/8/16 Ch H.264 Real Time Standalone DVR




Main Features

- 4/8/16 Ch H.264 real time Standalone DVR
- 4/8/16 Channel real time recording
- H.264 video compression algorithm ideal
- All channel simultaneous playback with Audio
- Powerful network software, multi DVR client, MSS (Mobile phone surveillance software) & CMS
- Powerful remote configuration supported
- Programmable display/ spot out/ alarm mode
- Programmable recording mode with versatile options
- Resolution/ frame rate/ image quality adjustable per channel; D1 recording selection is available on each channel
- Smart camera settings: Privacy mask/ Digital zoom/ snapshot
- Easy Backup via USB Devices, DVD-RW, Network and Mobile Phone Surveillance
- Strong log function supported
- VGA 1280 X 1024 & HDMI 1080p video out
- Features for large scale installations



Connection

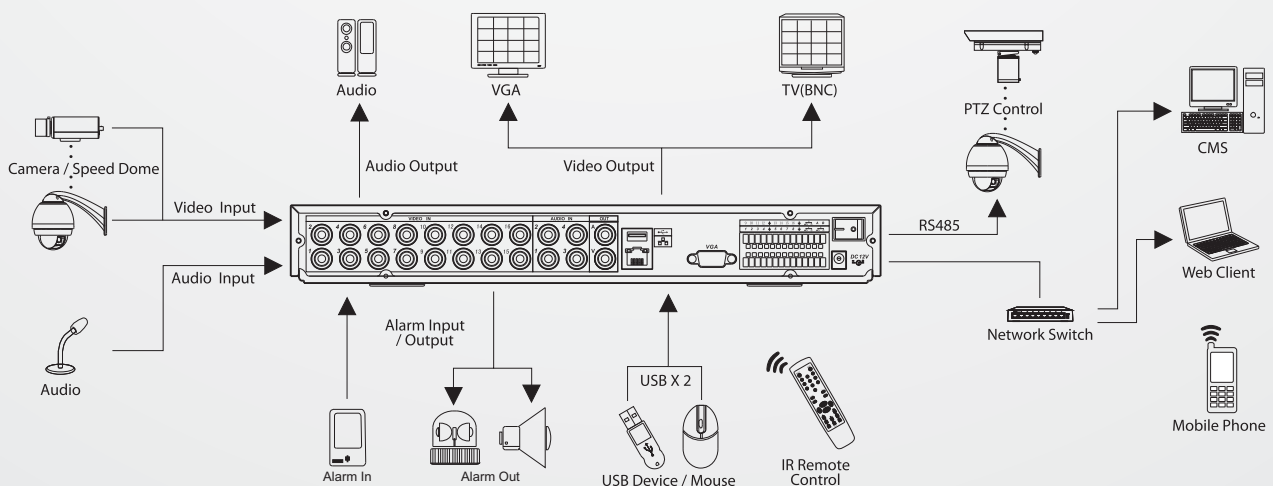

Specifications	CP-0404HD-T	CP-0804HD-T	CP-1604HD-T
User Interface	GUI		
Control Devices	Front panel, USB Mouse, IR Remote control,		
Video Input	4 Ch., BNC, 1.0Vp-p, 75ohm	8 Ch., BNC, 1.0Vp-p, 75ohm	16 Ch., BNC, 1.0Vp-p, 75ohm
Video Output	2 BNC (1.0Vp-p, 75 O), 1 VGA, HDMI, Max. Res.:1280x1024		
Video Standard	PAL: 625 Lines, 50f/s; NTSC: 525 Lines, 60f/s		
Compression	Video: H.264		
Video Resolution	NTSC: 720 X 480fps , PAL: 720 X 576 fps		
Video Recording	NTSC: 120/30fps , PAL: 100/25 fps	NTSC: 240/30fps , PAL: 200/25 fps	NTSC: 480/30fps , PAL: 400/25 fps
Video Display Split	Full and Multiple Screen Display, 1/4	Full and Multiple Screen Display, 1/4/9	Full and Multiple Screen Display, 1/4/9/16
Privacy Masking	Supported		
Audio Input	RCA x 4		
Audio Output	RCA x 1		
Motion Detection	Supported		
Alarm Input	4 Input	8 Input	16 Input
Alarm Output	1 Output		
Hard Disk	2 SATA HDD, (Max 2 TB per HDD Supported)		
CD/DVDRW	Supported		
Recording Mode	Manual, Timer, Motion, Sensor		
Recording Priority	Manual>Alarm>Video detection>Continuous		
Playback	All Ch. Simultaneous playback		
Backup Mode	USB Devices, Network, CD/DVDRW		
Interface Ports	RJ45 x 1, USB 2.0 x 2, RS232 x 1, RS485 x 1		
Protocols	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Email, Alarm Server		
Remote Operations	Monitor, PTZ Control, Playback, System Setting, file download, Log information		
Power Supply	12V DC		
Working Temp	0°C~50°C		
Dimensions	300mm X 260 mm X 55 mm (W X D X H)	430mm X 384 mm X 55 mm (W X D X H)	