

DH-DVR0404HD-S

4 Channel HD-SDI 1080P 2U Standalone DVR



100/120fps@1080P recording, 4 channel HD-SDI (1080P/1080i/720P) video inputs, 4 channel audio inputs, and 4 channel loop outputs. It can support HDMI, VGA, eSATA, USB2.0 and 8 HDDs.

Features

- > 4 channel HD-SDI 1080P standalone DVR
- > Dual-core CPU presents the powerful preview, recording, playback and network performance
- > 4 channel 1080P(25/30)/1080i(50/60)/720P(25/30,50/60) HD-SDI video inputs
- > H.264 dual-stream video compression
- > 4 channel@1080P realtime recording
- > HDMI / VGA / TV (BNC) synchronous video output
- > Up to 4 channel 1080P cameras realtime preview
- > 4 channel simultaneous realtime playback, GRID interface & smart search
- > Smart video detection: MD, camera blank, video loss
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Easy backup: USB devices, CD/DVD-RW & network download
- > Alarm triggering screen tips, buzzer, PTZ, e-mail & FTP upload
- > Support 8 SATA HDDs up to 24TB, 1 eSATA up to 12TB, 3 USB2.0
- > Built-in web server, CMS(DSS/PSS) & DMSS

DH-DVR0404HD-S

Specifications


Model	DH-DVR0404HD-S
System	
Main Processor	High performance Dual-core embedded microprocessor
Operating System	Embedded LINUX
System Resources	Pentaplex function: live, recording, playback, backup & remote access
Control Mode	Front panel, USB mouse, IR remote control, Keyboard, Network
Video	
Input	4 channel, HD-SDI video, BNC
Standard	1080P(25/30)/1080i(50/60)/720P(25/30,50/60)
Output	1 HDMI, 1 VGA, 1 TV(BNC, 1.0Vp-p, 75Ω)
Loop Output	4 channel, HD-SDI, BNC
Audio	
Input	4 channel, BNC(200-2800mV, 30KΩ)
Output	1 channel, BNC(200-3000mV, 5KΩ)
Voice Intercom	1 channel input, BNC(200-2800mV, 30KΩ), 1 channel output, BNC(200-3000mV, 5KΩ)
Display	
Display Split	1/4
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Tour Display	Support
Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera
OSD	Camera title, time, video loss, camera lock, motion detection, recording
Recording	
Video/Audio Compression	H.264 / G.711
Image Resolution	1080P(1920×1080), 1080P/4(960×540), 1080P/16(480×270), 720P(1280×720), 720P/4(640×360), 720P/16(320×180)
Encoding Speed	Main Stream: 1080P , 1080P/4, 720P, 720P/4 (1~25/30fps/) Extra Stream: 1080P/4, 1080P/16, 720P/4, 720P/16 (1~25/30fps)
Bit Rate	256~8096Kb/s per channel
Recording Quality	CBR, VBR(1~6 level, level 6 is the best)
Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop
Recording Priority	Manual >Alarm >MD >Regular
Recording Interval	1~120 min. (default: 60 min.), Pre-record: 1~30 sec., Post-record: 10~300 sec.
Video Detection & Alarm	
Trigger Events	Recording, PTZ movement, Tour, Alarm, Email, FTP, Buzzer & Screen tips
Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)
Video Loss & Camera Blank	Support
Alarm Input	16 channel

DH-DVR0404HD-S

Relay Output	6 channel
Playback & Backup	
Playback Channel	1/2/4
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom(any size)
Backup Mode	Flash drive/ USB HDD/ USB CD&DVD-RW / eSATA Device / Built-in SATA burner/ Network download
Network	
Ethernet	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information
Hard Disk	
Hard Disk	8 SATA ports, 8 HDDs or 6 HDDs + 1 CD/DVD-RW, Up to 24TB
eSATA	4 External SATA ports, up to 12TB
Space Occupation	Max 3.6GB/H per channel
HDD Management	HDD Group, HDD hibernation technology, HDD faulty alarm & Raid(Redundancy)
Auxiliary Interface	
USB Interface	3 ports, For mouse control & backup
RS232	Dahua keyboard, PC communication
RS485	PTZ control
Environmental	
Power Supply	AC 100~240 V, 50/60 Hz
Power Consumption	40W(without HDD)
Working Environment	-10 ~+55°C / 10~90%RH / 86~106kpa
Dimension	2U, 440mm×460mm×89mm(W×D×H)
Weight	6.5KG(without HDD)

DH-DVR0404HD-S

System Connection

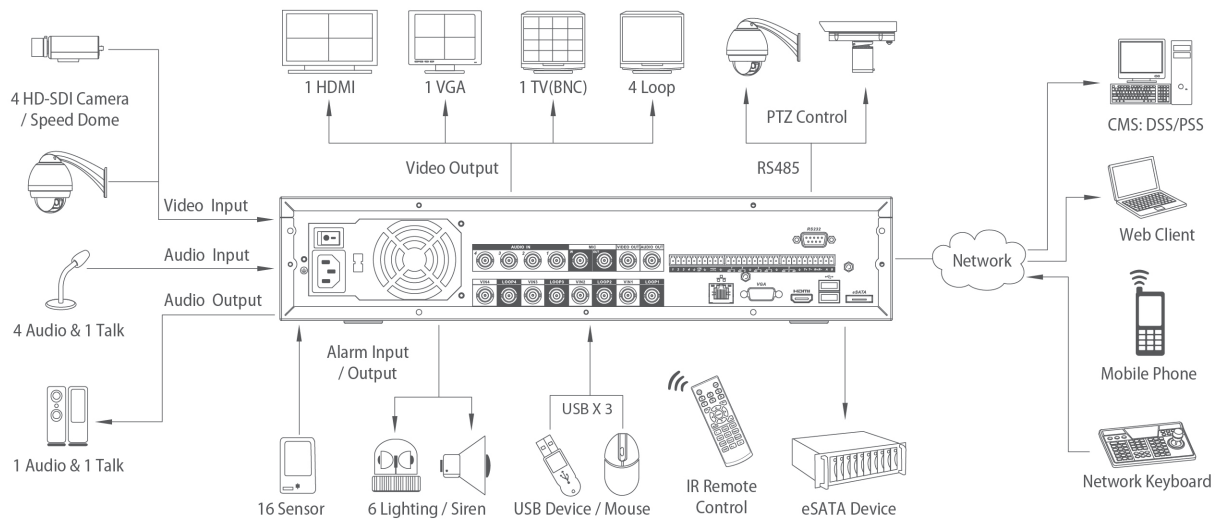

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2011 Dahua Technology Co., Ltd.