


## DS-7204AHLI-VS Standalone DVR



### Key Features

- Each channel supports up to 4CIF recording and CIF real-time recording
- Dual stream
- VGA output
- 1 SATA interface
- On-screen display (OSD)
- Up to 4-ch synchronous playback

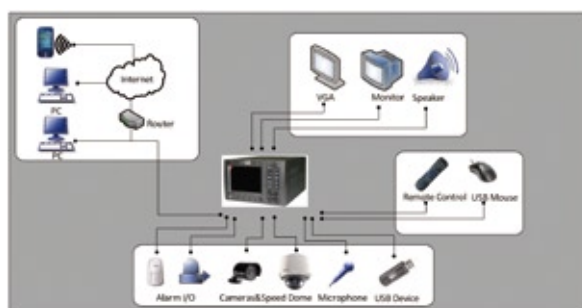

### Specifications

		DS-7204AHLI-VS
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC(1.0Vp-p, 75Ω)
	Audio compression	OggVorbis, 16Kbps
	Audio input	1-ch
	Audio input interface	RCA (2.0Vp-p, 1KΩ)
Video/Audio output	Voice talk input	1-ch, (Using Audio IN)
	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)
	VGA output	1 VGA interface can support resolution: 1024x768/60Hz
	Recording resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Video output	1 Channel BNC (1.0Vp-p, 75Ω)
	Video spot output	1 Channel BNC (1.0Vp-p, 75Ω)
	Frame rate	4CIF: 6fps, DCIF: 12fps, 2CIF: 12fps, CIF: 25(P)/30(N) fps
	Stream type	Video/Video&Audio
	Support dual stream	Yes
	Video bit rate	32Kbps~2Mbps, or user-defined (Max. 8Mbps)
	Audio output	1 channel, RCA (2.0Vp-p, 600Ω)
Hard disk driver	Interface type	1 SATA interface
	Capacity	Up to 2TB capacity
External interface	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS-485 interface (T+, T-, R+, R-)
	USB interface	1 USB interface, can support USB disk, USB HDD, USB DVD-R/W and CD-R/W
	Alarm input	4-ch
	Alarm output	1-ch
	Support Buzzer	Yes
General	Power supply	12VDC
	Consumption	≤25W (without HDD)
	Working temperature	-10°C~+55°C(14°F~131°F)
	Working humidity	10%~90%
	Dimension	270(D)x200(W)x130mm(H)(10.63"(D)x7.87"(W)x5.12"(H))
	Weight(without HDD)	≤5000g (11.02lbs)