




DS-2CC502/512/592P(N)-IR Color IR Dome Camera

- Compact design
- 1/3" Sony Super HAD CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 LUX with IR)
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Weather Proof: IP66 standard

Unit: mm

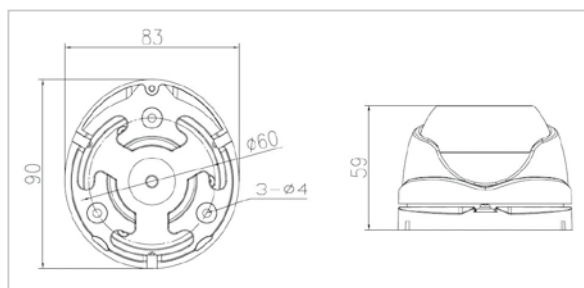

Specifications

	DS-2CC502P(N)-IR	DS-2CC512P(N)-IR	DS-2CC592P(N)-IR	
Camera	Image Sensor	1/3 " SONY Super HAD CCD		
	Effective Pixels	PAL: 500(H)×582(V) NTSC: 510(H)×492(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL/NTSC		
	Min. Illumination	0.1Lux @ F1.2 (0 LUX with IR)		
	Electronic Shutter	1/50 (1/60)s~1/100,000s		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω/BNC)		
Lens	S/N Ratio	More than 48 dB		
	BLC	ON		
	Lens	6mm (3.6mm, 2.8mm optional)		
	IR Range	Approx 10 to 20 meters (30~60ft)		
	Weather Proof	IP66		
	Power Supply	12VDC, ±10%		
	Power Consumption	3W MAX		
	Working Temperature	-10°C~60°C(14°F~140°F)		
General	Dimension	Φ89.5mm×60mm (Φ3.52"×2.36")		
	Weight	400g (0.88lbs)		

Available Models

DS-2CC502P-IR, DS-2CC502N-IR, DS-2CC512P-IR, DS-2CC512N-IR, DS-2CC592P-IR, DS-2CC592N-IR